



EXPRES CUT A81

CE EN60974-7



CODE			
PAA106M-000-WA3	6 m	19.7'	 1/4 GAS
PAA106M-071-WA3	6 m	19.7'	 3/8 GAS
PAA106M-004-WA3	6 m	19.7'	 CENTRAL 004
PAA106M-304-WA3	6 m	19.7'	 TRAFIMECTOR® 304

TECHNICAL DATA		
 HF	EXPRES CUT A81	
	0,6 kg	1,32 lb
V PEAK	500	
	5 bar	
	155 l/min	
X 60%	80 A	
X 100%	60 A	
	20-25mm	25/32" - 1"

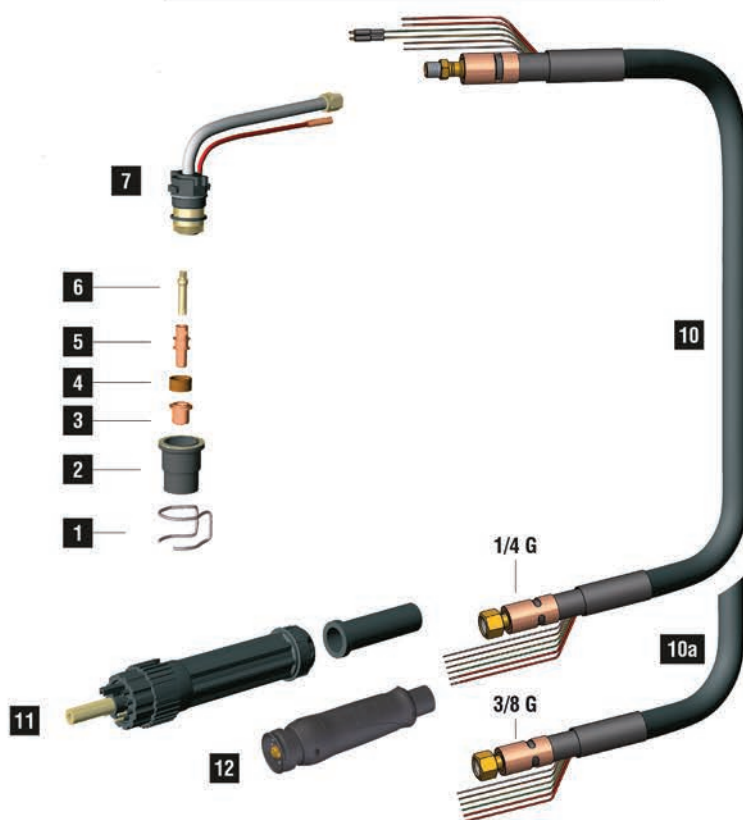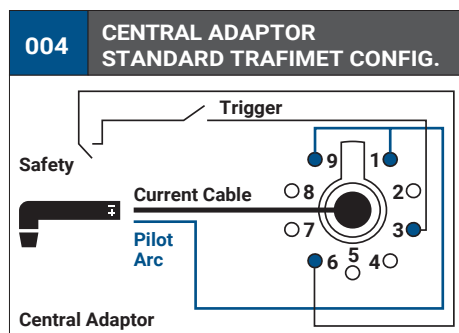

	CODE			Ø		CONTACT		DRAG		GOUGING	REF	
												
1	CV0026		stand off guide		25,5 mm	•						2
1	CV0028		stand off guide		20,5 mm	•						10
1	CV0033		stand off guide		26 mm	•						2
1	CV0051		stand off guide	24,3 mm	31 mm	•						1
1	CV0201		ceramic stand off guide		30 mm		•					1
2	PC0115		nozzle		35,4 mm	•	•					2
3	PD0105-10		50 A	1,0 mm .040"	13,3 mm	•						10
3	PD0105-12		80 A	1,2 mm .047"	13,3 mm	•						10
3	PD0106-12		80 A	1,2 mm .047"	25,8 mm		•					10
4	PE0107		diffuser		8,2 mm	•	•					2
5	PR0109		electrode		27 mm	•						10
5	PR0115		electrode		39,5 mm		•					10
6	FH0560		air tube		28 mm	•						1
6	FH0561		long air tube		40 mm		•					1

	CODE			
7	EA0125		O-ring Ø 15,6 x 1,78 mm	10
7	PF0140		A81 torch head	1
8	TP0310		trigger kit	1
9	TP0303		handle kit	1
9	BW0424		spring joint	1
10	PH4003		coaxial cable - 6 m / 19.7' - 1/4 G (no pin)	1

	CODE			
10a	PH4009		coaxial cable - 6 m / 19.7' - 3/8 G (no pin)	1
11	BW0147		cable support	10
11	FY0023		plasma central adaptor - 5 pins	1
12	FY0090		TRAFIMECTOR® central adaptor - torch side	1
	EA0254		pin extractor for central adaptor	1
	PT0202		male spring pins kit (5 pcs)	1

STANDARD



CONTACT SHORT



CONTACT LONG



DRAG SHORT



DRAG LONG



GOUGING