



EXPRES CUT S105


CE EN60974-7




CODE			
PAS606M-000-WA3	6 m	19.7'	 1/4 GAS
PAS606M-004-WA3	6 m	19.7'	 CENTRAL 004
PAS606M-304-WA3	6 m	19.7'	 TRAFIMECTOR® 304

TECHNICAL DATA		
 NO HF	EXPRES CUT S105	
 1 m	0,7 kg	1,54 lb
V PEAK	500	
	5 bar	
	180 l/min	
X 60%	100 A	
X 100%	70 A	
	25-30mm	1"-1 3/16

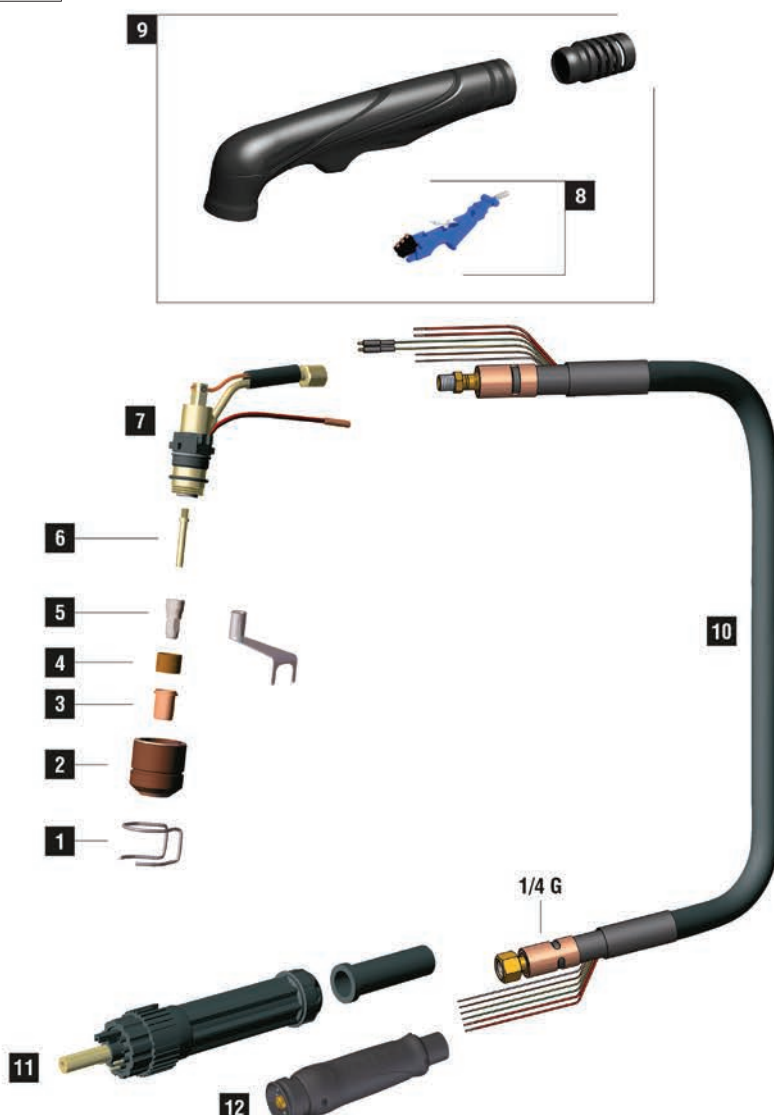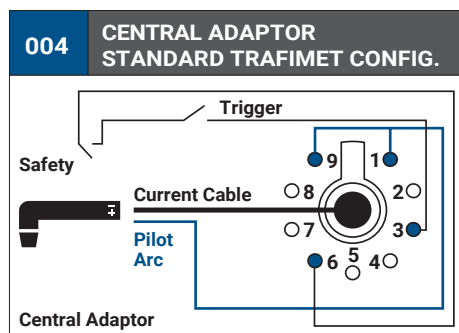

	CODE			Ø		CONTACT		DRAG		GOUGING	REF	
												
1	CV0009				38,6 mm					•		10
1	CV0011				23 mm	•					1386	10
1	CV0012				30 mm	•					1408	2
1	CV0014				30 mm	•						2
1	CV0021			32,8 mm	40,6 mm	•						1
2	PC0118				39,5 mm	•						4
2	PC0119				32 mm				•			2
3	PD0119-10			50 A	1,0 mm .040"	18,7 mm	•					10
3	PD0119-12			70 A	1,2 mm .047"	18,7 mm	•					10
3	PD0119-14			100 A	1,4 mm .055"	18,7 mm	•					10
3	PD0122-12			70 A	1,2 mm .047"	34,3 mm			•			10
4	PE0112				11,5 mm	•			•			2
5	CV0080											1
5	PR0117				23,7 mm	•						10
5	PR0120				39,5 mm				•			10
6	FH0647				36 mm	•						10
6	FH0820				50 mm				•			10

	CODE			
7	EA0223		O-ring Ø 18x1 mm	10
7	PF0136		S105 torch head	1
8	TP0310		trigger kit	1
9	TP0303		handle kit	1
9	BW0424		spring joint	1

	CODE			
10	PH4003		coaxial cable - 6 m / 19.7' - 1/4 G (no pin)	1
11	BW0147		cable support	10
11	FY0023		plasma central adaptor - 5 pins	1
12	FY0090		TRAFIMECTOR® central adaptor - torch side	1
	EA0254		pin extractor for central adaptor	1
	PT0202		male spring pins kit (5 pcs)	1

STANDARD



CONTACT SHORT



CONTACT LONG



DRAG SHORT



DRAG LONG



GOUGING