



EXPRES CUT S25

CE EN60974-7



CODE			
PAS204M-095-WB3	4 m	12.5'	 DIRECT 2 WIRES

TECHNICAL DATA		
 NO HF	EXPRES CUT S25	
 1 m	0,4 kg	0,88 lb
 V PEAK	500	
	5 bar	
	95 l/min	
 X 60%	25 A	
	6-8 mm	1/4" - 5/16"

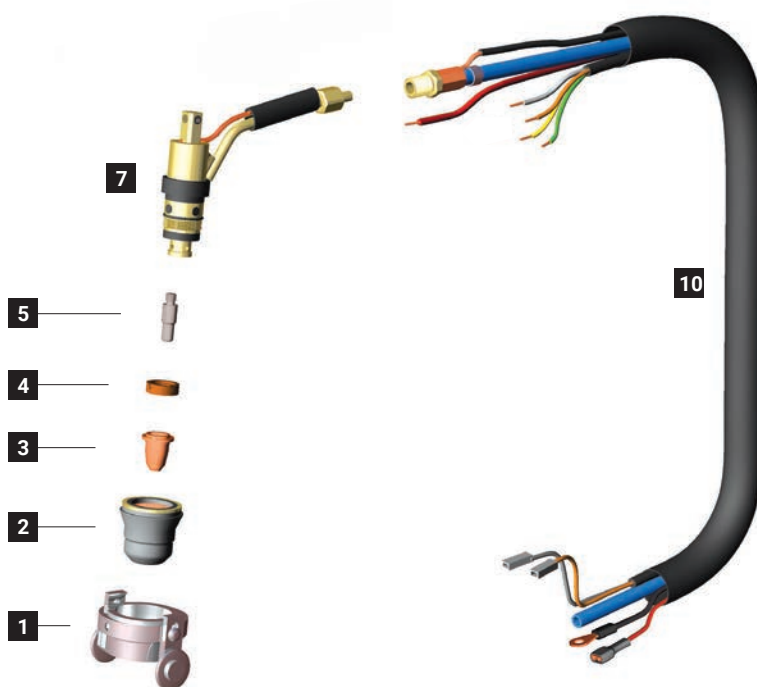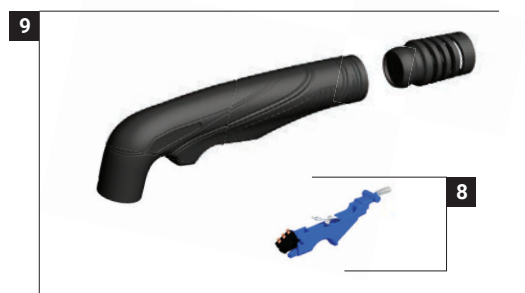

	CODE			Ø		CONTACT		DRAG		GOUGING	REF	
												
1	CV0024		stand off guide	23,5 mm	33 mm	•						1
2	PC0116		nozzle (no ring)		28 mm	•	•				60389	4
3	PD0103-09		40 A	0,9 mm .035"	25,8 mm		•					10
3	PD0103-65		20 A	0,65 mm .025"	25,8 mm		•					10
3	PD0116-06		20 A	0,6 mm .023"	17,3 mm	•						10
3	PD0116-08		30 A	0,8 mm .030"	17,3 mm	•						10
3	PD0116-09		40 A	0,9 mm .035"	17,3 mm	•						10
4	PE0106		Swirl ring		4,6 mm	•	•				60028	2
5	PR0106		electrode		30,5 mm		•					10
5	PR0110		electrode		21,8 mm	•						10

	CODE			
7	EA0330		o-ring	10
7	PF0127		S25K - S35K - S25 - S45 torch head	1
8	TP0310		trigger kit	1

	CODE			
9	TP0301		handle kit	1
9	BW0424		spring joint	1
10	PH4016		cable assembly - 4 m / 12' - direct 2 wires	1

STANDARD



CONTACT SHORT



CONTACT LONG



DRAG SHORT



DRAG LONG



GOUGING