



EXPRES CUT S25K

CE EN60974-7



CODE			
PAS004M-096-WB3	4 m	12.5'	

TECHNICAL DATA		
 NO HF	EXPRES CUT S25K	
 1 m	0,4 kg	0,88 lb
 V PEAK	500	
 2 bar	31 l/min	
 35%	20 A	
 4-6 mm	5/32" - 1/4"	

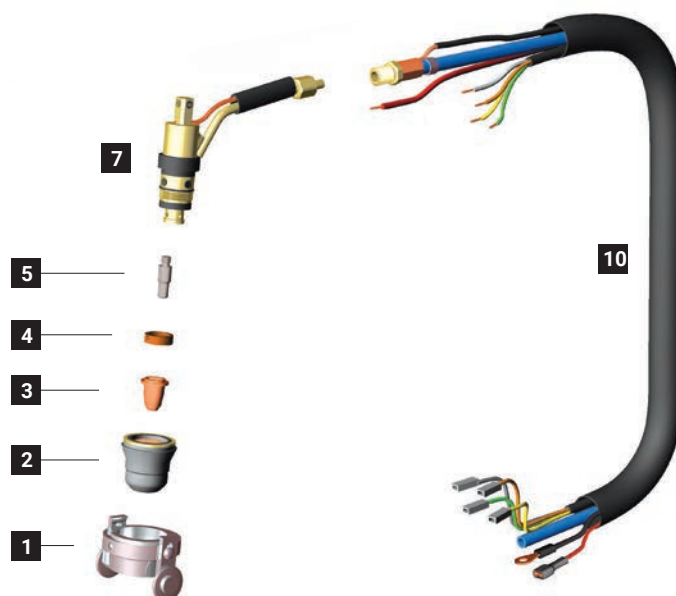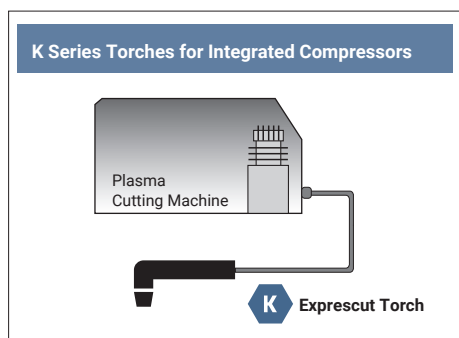

	CODE			Ø		CONTACT		DRAG		GOUGING	REF	
												
1	CV0024		stand off guide	23,5 mm		33 mm						1
2	PC0117		nozzle (1 ring)			28 mm						4
3	PD0103-09		40 A	0,9 mm	.035"	25,8 mm						10
3	PD0103-65		20 A	0,65 mm	.025"	25,8 mm						10
3	PD0116-06		20 A	0,6 mm	.023"	17,3 mm						10
3	PD0116-08		30 A	0,8 mm	.030"	17,3 mm						10
3	PD0116-09		40 A	0,9 mm	.035"	17,3 mm						10
4	PE0106		Swirl ring			4,6 mm					60028	2
5	PR0106		electrode			30,5 mm						10
5	PR0110		electrode			21,8 mm						10

	CODE			
7	EA0330		o-ring	10
7	PF0127		S25K - S35K - S25 - S45 torch head	1
8	TP0310		trigger kit	1

	CODE			
9	TP0301		handle kit	1
9	BW0424		spring joint	1
10	PH4015		cable assembly - 4 m / 12' - direct 4 wires	1

STANDARD

 CONTACT SHORT CONTACT LONG DRAG SHORT DRAG LONG GOUGING