
DATA SHEET

BBWSG Cover Ø 26.7 mm

394-008386-00000

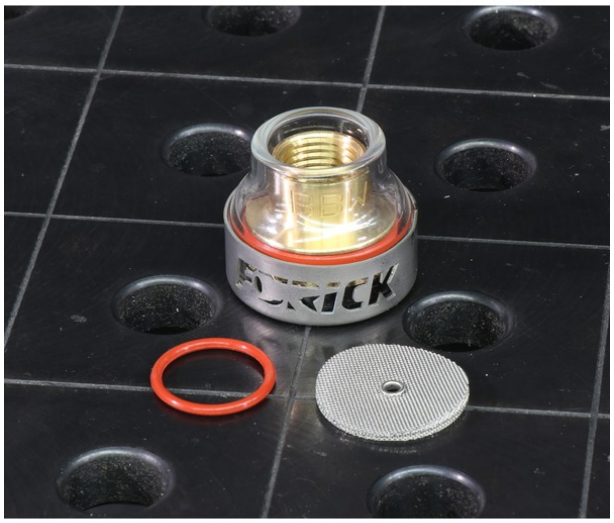

- Glass gas nozzle set containing 1 nozzle, filter sieve, sealing ring and 1 titanium protection, plus 1 spare filter and sealing ring
- BBW gas nozzles (Ø 26.7 mm) guarantee optimal shielding gas coverage but cannot be fully used in tight spaces
- Guarantees an optimum view while welding
- Maximum load: 200 A, DC
- BBWSG glass gas nozzles are screwed onto the torch, thus offering even greater processing stability than standard BBW glass gas nozzles.
- The titanium ring increases sliding resistance during welding while protecting against damage
- **Instructions for use:**
- FURICK gas nozzles can only be operated with an electrode diameter of 2.4 mm
- The gas nozzle holder set (094-023224-00000) is required for use on SR 17/18/26 welding torches
- For use on SR 9/20 welding torches, the torch must be fitted with a collet (094-022705-00000 or alternatively 094-000934-00000) and a collet body with gas lens (094-001354-00000)
- Only suitable for use in TIG DC welding. Please contact us about AC applications

Nozzle Ø	26.7 mm

© 2026 / subject to technical changes / Status: 2026-11-19 / Page 1 of 1